


CA82 Series Hermitically-sealed,Non-solid Electrolytic Tantalum Capacitor

Brief Introduction

- Silver Fabric, Hermitically-Sealed, Tubular, Axial-lead, With insulation sleeve, Heteropolarity;
- Stable in Electrical Characteristics, High reliability, Long life-span, Low DF & DCL;
- Excellent working ability under High Temperature, Available in 175°C;
- Applying in Petroleum deep-well's measurement & drilling such High-Temperature resistance Electrical Equipments with DC&ImPulse Circuit for Military and Civil use;
- Operative Standard: QJ/PWV80-2002;
- Ordering Information: CA82-227K010, 100pcs.

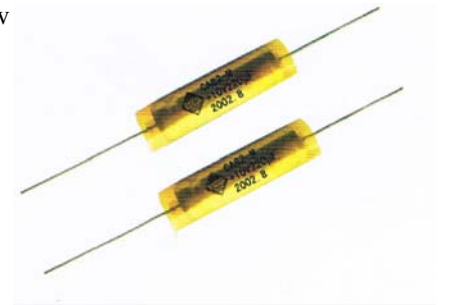

Features

- Operating Temperature Range: -55°C~+175°C (When >155°C, with rated voltage derating) ;
- Capacitance tolerance: K: ±10%; M: ±20%; Q: -10%~+30%;
- DF at 25°C, 100 Hz: See Table 2;
- DCL: at 25°C $I \leq 0.001 C_R U_R$ (μA) or $1 \mu A$ (Choose the greater one)
at 85°C $I \leq 0.008 C_R U_R$ (μA) or $8 \mu A$ (Choose the greater one)
At 200°C $I \leq 0.04 C_R U_R$ (μA) or $40 \mu A$ (Choose the greater one)

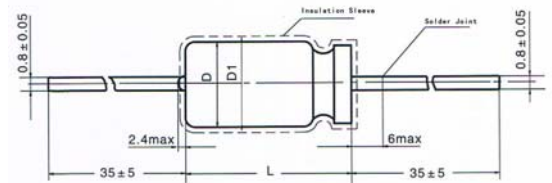


Table1 Dimensions and Max weight

Case Code	Max Weight (g)	with no Insulation Sleeve		with Insulation Sleeve	
		D±0.5 (mm)	L±2 (mm)	D ₁ max (mm)	Lmax (mm)
1	4	5	14	5.8	16
2	5	6	16	6.8	18
3	7	8	16	8.8	18
4	10	8	22	8.8	24
5	14	10	22	10.8	24
6	17	10	25	10.8	27
7	20	10	30	10.8	32

Table 2 Electrical Characteristics

Rated Voltage U_R (V)	Derating Voltage U_C (V)	Case Code	Nominal Capacitance C_R (μ F)	$\text{tg}\delta$ (%) 25°C	Rated Voltage U_R (V)	Derating Voltage U_C (V)	Case Code	Nominal Capacitance C_R (μ F)	$\text{tg}\delta$ (%) 25°C	Rated Voltage U_R (V)	Derating Voltage U_C (V)	Case Code	Nominal Capacitance C_R (μ F)	$\text{tg}\delta$ (%) 25°C
6 (6.3)	4	1	22	12	16 (15)	10	6	470	50	40	25	1	10	8
		1	33	15			1	10	10			1	15	10
		1	47	15			1	15	10			2	22	20
		1	68	30			1	22	10			2	33	20
		2	100	20			2	33	20			3	47	20
		2	150	50			2	47	15			3	68	20
		3	220	45			2	56	20			4	100	35
		3	330	70			3	68	25			5	150	35
		4	470	75			3	100	25			6	220	30
		4	680	65			4	150	50			6	330	35
		5	1000	80			4	180	50			7	470	45
		5	1200	90			4	220	50					
10	6.3	1	10	10	25	15	5	330	40	50	32	1	4.7	6
		1	22	12			5	470	60			1	10	8
		1	33	15			1	22	12			2	15	10
		1	47	15			2	33	15			2	22	15
		2	68	30			2	47	18			2	33	15
		2	100	20			2	68	20			3	47	20
		3	120	40			3	100	30			4	68	25
		3	150	50			3	120	35			4	82	25
		3	220	45			4	150	40			4	100	25
		4	330	70			4	220	50			4	120	30
		5	470	75			5	270	55			5	160	30
		6	680	65			5	300	60			5	220	35
16 (15)	10	1	1	8	30	19	5	330	60	50	32	7	330	40
		1	4.7	8			5	470	65			1	4.7	6
		1	10	10			6	560	70			1	6.8	8
		1	15	10			1	1	6			2	10	8
		1	22	10			1	4.7	8			2	15	10
		1	33	12			1	6.8	10			2	22	18
		2	47	20			2	22	15			3	33	18
		2	68	20			2	39	20			3	39	20
		2	100	35			2	47	20			4	47	25
		2	120	35			3	68	25			5	68	25
		3	150	35			4	100	30			5	100	25
		4	220	60			5	150	35			5	150	28
4	270	65	6	220	40	6	220	30						
5	330	70	6	330	50	7	270	35						
									7	330	40			

Table 2 Electrical Characteristics,Continued

Rated Voltage U_R (V)	Derating Voltage U_C (V)	Case Code	Nominal Capacitance C_R (μ F)	$tg\delta$ (%) 25°C	Rated Voltage U_R (V)	Derating Voltage U_C (V)	Case Code	Nominal Capacitance C_R (μ F)	$tg\delta$ (%) 25°C	Rated Voltage U_R (V)	Derating Voltage U_C (V)	Case Code	Nominal Capacitance C_R (μ F)	$tg\delta$ (%) 25°C
63(60)	40(38)	7	470	45	100	63	1	3.3	6	125	75	1	2.2	6
75	48	1	6.8	8			1	4.7	6			1	3.3	6
		2	10	10			2	6.8	8			1	3.6	6
		2	15	12			2	10	10			2	4.7	6
		3	22	15			3	15	15			2	6.8	8
		3	33	20			3	22	15			3	10	15
		4	47	25			4	33	20			3	15	15
		5	68	25			5	43	25			4	22	20
		5	82	25			5	47	25			5	33	20
		6	120	30			6	68	20			6	47	20
		6	180	30			6	82	25			6	56	25
		7	220	35			6	100	25			7	82	25
							6	120	25			7	100	25
							7	220	28			7	120	25

P.S. : 1 Please do not use multimeter through the measuring procedures.

2 Capacitance and DF measured at :100Hz, $U_{DC} = 2.2^{+0.10}V$, $U_{AC} = 1.0^{+0.05}V$, Frequency=100Hz.

Test only applied in series equivalent circuit.

3 Voltage derating is applied at +175°C. (The DCL parameter should be read after 5 minutes when it connected to the circuit) .

4 Special size and demand could consult with us.